
MULTI-USE OIL MX-900

Updated: 14.07.2022

EN

1 / 1

TECHNICAL DATASHEET

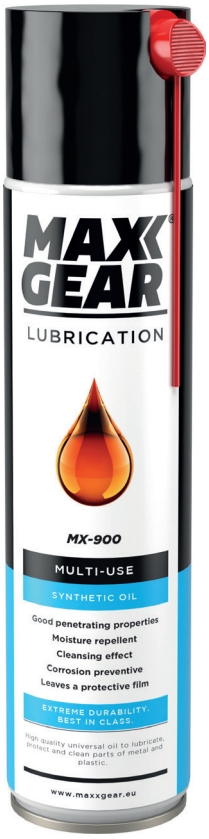

MULTI-USE OIL MX-900	
Package sizes	400ml
Description	High quality synthetic lubricating oil. Suitable for lubrication and protection of metal and plastic parts.
TECHNICAL DATA	
Composition	Synthetic oil
Color	Translucent light brown
VOC content	Approx. 82 %
Relative density (20°C)	0,80 g/ml
Pressure (20°C)	3–4 bar
Temperature resistance	-50°C ... +200°C
Shelf-life	10 years

FEATURES

- Excellent penetration ability
- Lubricates and cleans at the same time
- Moisturizing
- Prevents corrosion
- Leaves a thin protective film
- Accurate pressure spray

USAGE

The aerosol should be at room temperature. The operating temperature should be +5°C ... +30°C. Shake before use. Apply oil to the surface to be treated. Optimal lubrication is obtained after evaporation of the solvent. Repeat if necessary.

TDS

RAKENNUSKEMIA

Kerkkolankatu 17
05800 HYVINKÄÄ
FINLAND

info@rakennuskemia.com
www.rakennuskemia.com
+358 - 19 - 457 4400